

Hydraulic Inspection


Test Pressure	SHELL	2.10Mpa
	SEAL	1.54Mpa
Temperature	AIR	0.60Mpa
	Medium	5205°C Water, Steam, Oil etc

Technical Standard

Design	JIS F7425
Face to Face	JIS B2002
Flange End	JIS B2220
T&Rressure	JIS B2073
Inspection&Test	JIS F7400


Material List

17	Disc	Stainless Steel	SS420
16	Seat Ring	Stainless Steel	SS410
15	Baffle Ring	Stainless Steel	SS410
14	Stud Bolt	Steel	SS400
13	Packing	Graphite	
12	Stud Bolt	Steel	SS400
11	Packing Gland	Cast Iron	FC200
10	Nut	Steel	SS400
9	Screw Nut	Steel	SS400
8	Cushion	Steel	SS400
7	Nut	Steel	SS400
6	Pin	Stainless Steel	SS410
5	Handwheel	Cast Iron	FC200
4	Stem	Stainless Steel	SS410
3	Bonnet	Cast Iron	FC200
2	Seat Ring	Non-Asbestos	
1	Body	Cast Iron	FC200

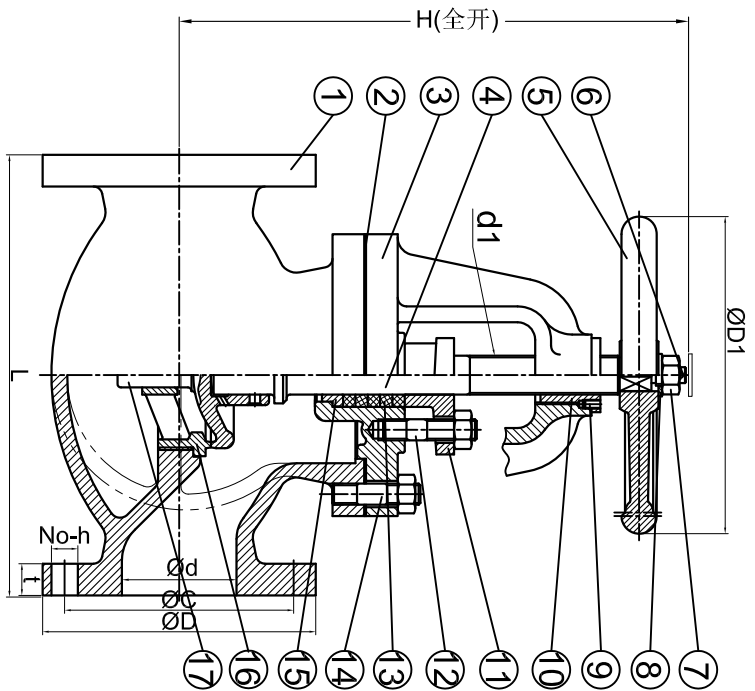

MAIN DIMENSIONS

SIZE	d	L	D	C	No-h	t	H	D1	Weight Kgs	CODE
50A										750231
65A	65	270	175	140	4*19	22	310	200	28.70	750232
80A										750233
100A										750234
125A										750235
150A										750236
200A										750237
250A										750238
300A										750239
350A										
400A										



Drawing NO.	CHKID	CHKID	APPID
	RH-GLVV-058	Tom	Cathrine
Product Name	CAST IRON FALNGED GLOBE VALVE		
	JIS F7307 10K		
<p>QINGDAO RONGHANG MARINE VALVE MANUFACTURING CO.,LTD</p> <p>www.marine-valve.com</p>			