

Hydraulic Inspection


Test Pressure	≤DN200	SHELL	2.10Mpa	SEAL	1.54Mpa
	≥DN250	SHELL	1.50Mpa	SEAL	1.10Mpa
Max Working Pressure	AIR 0.60Mpa				
	<DN200	<205℃ Steam	Saturated Vapor	Air/Oil/Water	<120℃ Static water
	>DN250	1.00 Mpa	1.00 Mpa	1.00 Mpa	1.40 Mpa
		-	0.50 Mpa	-	1.00 Mpa

Technical Standard

Design	JIS F7308
Face to Face	JIS B2002
Flange End	JIS B2220
T&Rressure	JIS B2073
Inspection&Test	JIS F7400

Material List

19	Disc	Cast Brass	C3771BD
18	Seat Ring	Cast Brass	C3771BD
17	Washer	Cast Brass	C3771BD
16	Disc Nut	Cast Brass	C3771BD
15	Packing Baffle Ring	Cast Brass	C3771BD
14	Packing	Graphite	
13	Stem Nut	Cast Brass	C3771BD
12	Hex Nut	Steel	SS400
11	Cushion	Steel	SS400
10	Nuts	Steel	SS400
9	Pin	Steel	SS400
8	Handwheel	Cast Iron	FC200
7	Bonnet	Cast Brass	C3771BD
6	Stem	Brass	H62
5	Packing Gland	Cast Brass	C3771BD
4	Stud Bolt	Steel	SS400
3	Stud Bolt	Steel	SS400
2	Gasket	Graphite	
1	Body	Cast Brass	C3771BD

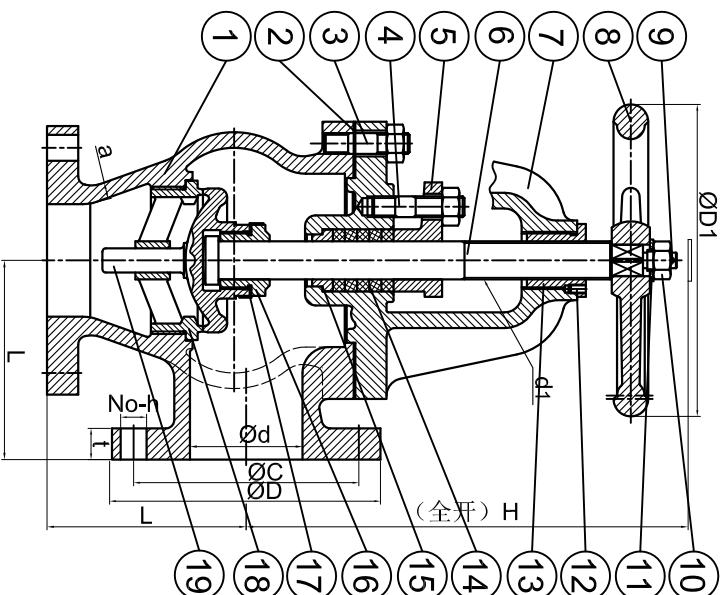

MAIN DIMENSIONS

SIZE	L	D	C	t	n-h	H	D1	d1	Weight kgs	CODE
50A										
65A	130	175	140	22	4*19	270	200	TR24	25.40	750247
80A										
100A										
125A										
150A										
200A										
250A										
300A										
350A										
400A										
450A										
500A										



QINGDAO RONGHANG MARINE VALVE
MANUFACTURING CO.,LTD

www.marine-valve.com

Product Name
**MARINE CAST BRASS FALNGED ANGLE
GLOBE VALVE JIS F7308 10K**

Drawing NO.	CHK'D	CHK'D	APP'D
RH-GLVV-060	Tom	Cathrine	Coco